



CONVERTIBLE CABI

Here is high-quality top selling products. These machines prepare either warm or cool towels for "omotenashi" or "hospitality" anytime.

HC-11LX Pro

HOT&COOL 1door type



NO COMPRESSOR

Convertible



HC-21LX Pro

HOT&COOL 2 door type




NO COMPRESSOR

Convertible



Model	HC-11LX Pro	HC-21LX Pro
Supply voltage	AC220-240V 1ph	AC220-240V 1ph
Power consumption	150W	300W
Outer dimensions	W450xD363xH322 mm	W450xD363xH562 mm
Inner dimensions	W348xD207xH152 mm	W348xD207xH152 mm x 2 doors
Capacity	11 liters	11 liters x 2 doors
	55 hand towels (approx. 20 face towels)	110 hand towels (approx. 40 face towels)
Net weight	10kg	17kg
Tem. Control	Electronics control/Peltier device	Electronics control/Peltier device
Cabinet inside temp.	HOT: 70-80°C(158-176°F)	HOT: 70-80°C(158-176°F)
	COOL: 7-10°C(44-50°F)	COOL: 7-10°C(44-50°F)
Accessories	Basket x 1, drain tray x 1	Basket x 2, drain tray x 1
Safety standard	CE	CE

Setting Location (COOL CABI)

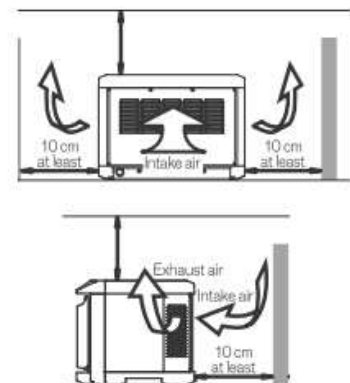

* Towels are not included



HOTCABI/COOLCABI

Hot-selling and long seller item line of towel warmers and cooler are here to provide happiness and comfort.

HC-6 Stylish and Compact!



HC-6 (W)
White



HC-6 (SUS)
Stainless steel



HC-6 (K)
Black

HC-8 Great in combination with the CC-8. High/low temperature setting

CC-8

Stay cool! You can combine with the HC-8 for both warm and cool use



NO COMPRESSOR



● ASA resin adopted

● ASA resin adopted

Model	HC-6	HC-8	CC-8
Supply voltage	AC110-120V/1ph (W)	-	-
	AC220-240V 1ph (W),(K),(SUS)	AC220-240V 1ph	AC220-240V 1ph
Power consumption	120W	140W	75W
Outer dimensions	W300xD307xH230 mm	W300xD340xH261 mm	W300xD340xH261 mm
Inner dimensions	W220xD220xH135 mm	W227xD237xH152 mm	W227xD182xH152 mm
Capacity	6 liters	8 liters	6 liters
	25-30 hand towels	35-45 hand towels	25-35 hand towels
	(approx. 10 face towels)	(approx. 15 face towels)	(approx. 15 face towels)
Net weight	4kg	4.5kg	5kg
Tem. Control	Bimetal thermostat	Bimetal thermostat	Peltier device
Cabinet inside temp.	70-80°C(158-176°F)	L: 60-70°C(140-158°F) H: 70-80°C(158-176°F)	7-10°C(44-50°F)
Safety device	Thermal fuse	Thermal fuse	-
Accessories	Basket x 1, drain tray x 1	Basket x1, drain tray x 1	Drain tray x 1
Safety standard	UL/cUL/CE	CE	CE

Oshibori Towels



COO: Vietnam
MATERIAL: Cotton 100%
QTY: 100 doz/bale
SIZE: ASK US



HOTCABI

Upgraded cabi for advanced presentation that provides a welcome service and gracious expression of hospitality.

HC-11UV Pro

UV lamp 1door type



Sterilizing UV lamp



HC-38

Large capacity towel storage



HC-38

HC-38UV

Large capacity towel storage with UV lamp



Sterilizing UV lamp



HC-38UV

Model	HC-11UV Pro	HC-38	HC-38UV
Supply voltage	AC110-120V 1ph	AC110-120V 1ph	AC110-120V 1ph
	AC220-240V 1ph	AC220-240V 1ph	-
Power consumption	190W	400W	400W
Outer dimensions	W450xD363xH322 mm	W450xD410xH450 mm	W450xD410xH450 mm
Inner dimensions	W348xD207xH152 mm	W360xD316.5xH345 mm	W360xD316.5xH345 mm
Capacity	11 liters	38 liters	38 liters
	55 hand towels	150-200 hand towels	150-200 hand towels
	(approx. 20 face towels)	(approx. 66 face towels)	(approx. 66 face towels)
Net weight	7.5kg	12kg	12kg
Tem. Control	Electronics control	Bimetal thermostat	Bimetal thermostat
Cabinet inside temp.	70-80°C(158-176°F)	70-80°C(158-176°F)	70-80°C(158-176°F)
Safety device	Thermal fuse	Thermal fuse	Thermal fuse
Accessories	Basket x 1, drain tray x 1	Basket x3, drain tray x 1	Basket x3, drain tray x 1
Sterilizing lamp	GTL-2 2W x 1	-	GTL-2 2W x 3
Safety standard	ETL/cETL/CE	CE	-

Aromachip



Quantity: 30 chips/package
Fragrance: 3 kinds
Lemon, Jasmine, Forest





* Towels are not included ● UV lamp does not light up when the door is opened.



FOODCABI

TAIJI food warmers are high capacity and great use for keeping prepared meal boxes or steamed egg custards. Good for quick "To-Go service, too.

HC-50N

100V only

Door heater



*Aluminum rack usage
(Steamed egg custards x 36-44 pcs.)

HC-50GN

100V only

Glass door



[OPTION]



Aluminum rack available
(HC-38/HC-50N/FC-50GN)

FC-100

100V only



FC-100G

100V only

Glass door



Model	HC-50N	FC-50GN	FC-100	FC-100G
Supply voltage	AC100V/1ph	AC100V/1ph	AC100V/1ph	AC100V/1ph
Power consumption	500W	500W	720W	720W
Outer dimensions	W450xD419xH616 mm	W450xD419xH616 mm	W500xD502xH810 mm	W500xD502xH810 mm
Inner dimensions	W350xD314xH450 mm	W350xD314xH450 mm	W400xD414xH615 mm	W400xD414xH615 mm
Capacity	50 liters	50 liters	100 liters	100 liters
Net weight	14.5kg	15.5kg	27kg	30kg
Tem. Control	Bimetal thermostat	Bimetal thermostat	Variable thermostat	Variable thermostat
Cabinet inside temp.	70-80°C (158-176°F)	70-80°C (158-176°F)	30-85°C (86-185°F)	30-85°C (86-185°F)
Accessories	Basket x 4, drain tray x 1	Basket x 4, drain tray x 1	Basket x 5, drain tray x 1	Basket x 5, drain tray x 1

* Bowls are not included